

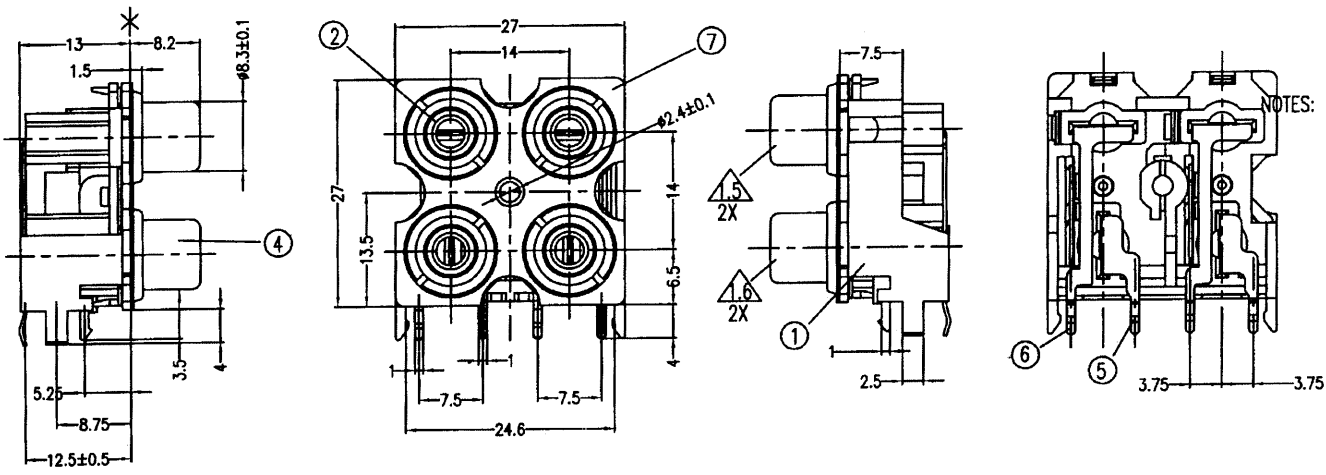
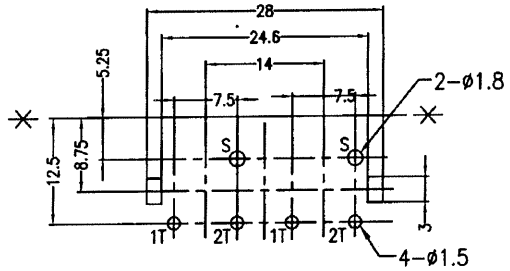


REV.	REF.	DESCRIPTION	DATE
A	2006-277	RELEASE NEW DRAWING FOR PRODUCTION	05/20/2005



- NOTES:
- MATERIAL:
 - HOUSING AND WASHER: PBT, UL94V-0
 - COVER: ABS, UL-94HB
 - CONTACTS: BRASS, TIN PLATED
 - SEALED PLATE: BRASS, TIN PLATED
 - INSULATION COLOR: WHITE
 - INSULATION COLOR: RED
 - ALL COMPONENTS ARE RoHS COMPLIANT
 - MECHANICAL:
 - INSERTION FORCE: 29.4N MAX.
 - WITHDRAWAL FORCE: 0.98N TO 29.4N
 - ELECTRICAL:
 - RATED VOLTAGE/RATED CURRENT: DC34V 2A
 - INSULATION RESISTANCE: 100 MEGOHMS MIN.
 - CONTACT RESISTANCE: 30 MILLIOHMS MAX.
 - DIELECTRIC STRENGTH: 500V AC r.m.s FOR 1 MINUTE
 - OPERATING TEMPERATURE RANGE: -25°C TO 70°C
 - UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ±0.3
 - PACKING:
 - SHIPPING CARTON WILL HAVE CUSTOMER PART NUMBER



T:1.6 Dimensions of PC board holes
Tolerance : ±0.1(Printed-side view)

7	SEALED PLATE	1	BRASS (C2680 T=0.3)	TIN PLATED
6	TERMINAL (2T)	2	BRASS (C2680 T=0.4)	TIN PLATED
5	TERMINAL (1T)	2	BRASS (C2680 T=0.4)	TIN PLATED
4	OUTER CONTACT	3	BRASS (C2680 T=0.4)	TIN PLATED
3	COVER	2	ABS	UL-94HB
2	WASHER	4	PBT	UL94V-0
1	HOUSING	1	PBT	UL94V-0
LTR	PART NAME	QTY	MATERIAL	REMARK

THESE DRAWINGS AND SPECIFICATION ARE THE PROPERTY OF RAPID CONN INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF RAPID CONN INC.

SIGNATURE	DATE	DESCRIPTION :
DRN. ANNIE AI	05/20/2005	RCA CONNECTOR, 4 POSITION
CHK. <i>Open zhu</i>	<i>05/22/2005</i>	RAPIDCONN P/N: RC4-13P
APP. <i>FL</i>	<i>5/22/05</i>	CUSTOMER P/N : N/A

CODE NO.	N/A	X±0.5	X±3.0'
CUS. NO.	N/A	.X±0.3	.X±2.0'
MATERIAL	N/A	.XX±0.10	.XX±1.00'
		.XXX±0.050	.XXX±0.500'
SCALE	UNIT	PAGE	
FREE	MM	1/1	



DWG NO. RC4-13P